




Medidas generales de los calibres - herradura
ROSCA AMERICANA - UNF - UNC

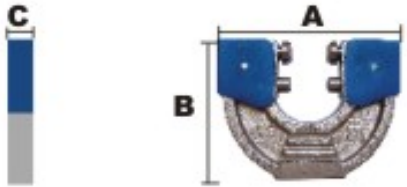

A SECTORES PERFILADOS					A RODILLOS	
Ø	h / "	Paso	A x B x C	Peso	Ø A x B x C	Peso
		mm	mm	gr	mm	gr
2	56	0,4536	68 x 54 x 11	120	48 x 44 x 16	120
3	48	0,5292	"	"	"	"
3	56	0,4536	"	"	"	"
4	40	0,6350	"	"	"	"
4	48	0,5292	"	"	"	"
5	40	0,6350	"	"	"	"
5	44	0,5772	"	"	"	"
6	32	0,7937	"	"	"	"
6	40	0,6350	"	"	"	"
8	32	0,7937	"	"	"	"
8	36	0,7056	"	"	"	"
10	24	1,0583	"	"	"	"
10	32	0,7937	"	"	"	"
12	24	1,0583	"	"	61 x 53,5 x 16	170
12	28	0,9070	"	"	"	"
1/4	20	1,2700	80 x 62,5 x 11	170	"	"
1/4	28	0,9071	68 x 54 x 11	120	"	"
1/4	32	0,7937	"	"	"	"
5/16	18	1,4110	80 x 62,5 x 11	170	"	"
5/16	24	1,0583	"	"	"	"
5/16	32	0,7937	"	"	"	"
3/8	16	1,5875	"	"	"	"
3/8	24	1,0583	"	"	"	"
3/8	32	0,7937	68 x 54 x 11	120	"	"
7/16	14	1,8143	80 x 62,5 x 11	170	"	"
7/16	20	1,2700	"	"	"	"
7/16	24	1,0583	"	"	"	"
7/16	28	0,9070	68 x 54 x 11	120	"	"
1/2	13	1,9538	80 x 62,5 x 11	170	"	"
1/2	20	1,2700	"	"	"	"
1/2	28	0,9070	68 x 54 x 11	120	"	"
9/16	12	2,1167	80 x 62,5 x 11	170	77 x 64 x 19	270
9/16	18	1,4110	"	"	61 x 53,5 x 16	170
9/16	24	1,0583	"	"	"	"
5/8	11	2,3090	"	"	77 x 64 x 19	270
5/8	18	1,4110	"	"	77 x 64 x 16	240
5/8	24	1,0583	"	"	"	"
3/4	10	2,5400	"	"	77 x 64 x 19	270
3/4	16	1,5875	92 x 69,5 x 11	230	77 x 64 x 16	240
7/8	14	1,8143	"	230	"	"

CALIBRADORES DE ROSCA EXTERNA - CALIBRE HERRADURA
ROSCA WHITWORTH - PARA CAÑOS - BSPP - CH A SECT. PERFILADOS

A SECTORES PERFILADOS					A RODILLOS	
Ø	h / "	Paso	A x B x C	Peso	Ø A x B x C	Peso
		mm	mm	gr	mm	gr
1/4	19	1,337	80 x 62,5 x 11	200		
3/8	19	1,337	"	200		
1/2	14	1,814	92 x 69,5 x 11	230		
5/8	14	1,814	"	"		
3/4	14	1,814	"	"		
1	11	2,309	104 x 78 x 11	260		